

STIPULATION FOR REUSE
THIS DRAWING WAS PREPARED FOR USE ON A SPECIFIC SITE AND IS NOT SUITABLE FOR ANY OTHER SITE. REUSE OF THIS DRAWING FOR ANY OTHER SITE WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT IS STRICTLY PROHIBITED. THE ARCHITECT ASSUMES NO LIABILITY FOR THE CONSTRUCTION OF ANY STRUCTURES OR OTHER WORK DERIVING FROM THIS DRAWING. THE ARCHITECT IS NOT RESPONSIBLE FOR OBTAINING ANY NECESSARY PERMITS OR REGULATORY APPROVALS.


**GWYNEDD MONTHLY MEETING OF THE
RELIGIOUS SOCIETY OF FRIENDS**
1101 Dekalb Pike, Gwynedd, Pa 19454
**ROUTE 202 EARTHEN BERM
AND NATURE PLAY FEATURES**

ISSUE BLOCK

1	Preliminary Design

CHECKED BY: LH
DRAWN BY: BA
FILE NAME:
DOCUMENT DATE: 02/16/2021
SCALE: As Noted

- NOTES:**
1. STAKE BERM, FENCE, AND TREE LAYOUT FOR REVIEW PRIOR TO INSTALLATION.
 2. PA ONE CALL NOTIFICATION IN ACCORDANCE WITH PA AT 287 OF 1974 AS AMENDED BY PA ACT 187 OF 1996. THE CONTRACTOR SHALL NOTIFY ALL UTILITIES WITHIN THE WORK AREA VIA THE PENNSYLVANIA ONE-CALL SYSTEM INC. (800-242-1776).
 3. THE LOCATION OF UNDERGROUND UTILITIES ARE TAKEN FROM PUBLIC RECORDS AND FIELD LOCATION OF VISIBLE SURFACE FEATURES. THE EXACT LOCATION AND DEPTH OF UNDERGROUND UTILITIES ARE APPROXIMATE AND HAVE NOT ALL BEEN INDEPENDENTLY VERIFIED BY THE OWNER OR ITS REPRESENTATIVE. CONTRACTOR SHALL DETERMINE THE NATURE, EXTENT, EXACT LOCATION AND DEPTH OF ALL EXISTING UTILITIES PRIOR TO INITIATING ANY CONSTRUCTION ACTIVITY.
 4. EXISTING TREES TO REMAIN ARE SUBJECT TO CERTIFIED ARBORIST REVIEW FOR HEALTH AND VIABILITY. PROVIDE TREE PROTECTION ACCORDING TO PROFESSIONAL ARBORIST RECOMMENDATIONS, INCLUDING RESTRICTIONS ON ACCESS AND GRADING WITHIN THE TREE CANOPY DRIP LINE.
 5. TOP OF BERM IS +/- 3'-0" ABOVE EXISTING GRADE UNLESS OTHERWISE NOTED. BERM SLOPE NOT TO EXCEED 3:1 OR BE LESS THAN 15:1.

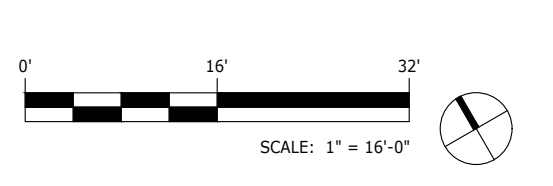

SITE PLAN

SHEET:
L100